


BT+APRS board FW: BHT_BOARD_V1.04_20220523.spi, improve the analog APRS decode.

ONLY for the radio with analog APRS RX, D878UVII PLUS and D578UV PLUS/D578UVIII PLUS.

For D878UVII PLUS:


1. Press and hold both top key(PF3) and side PF2 key, and power the radio ON, the radio display "UPDATE MODE FOR LinkBoard"

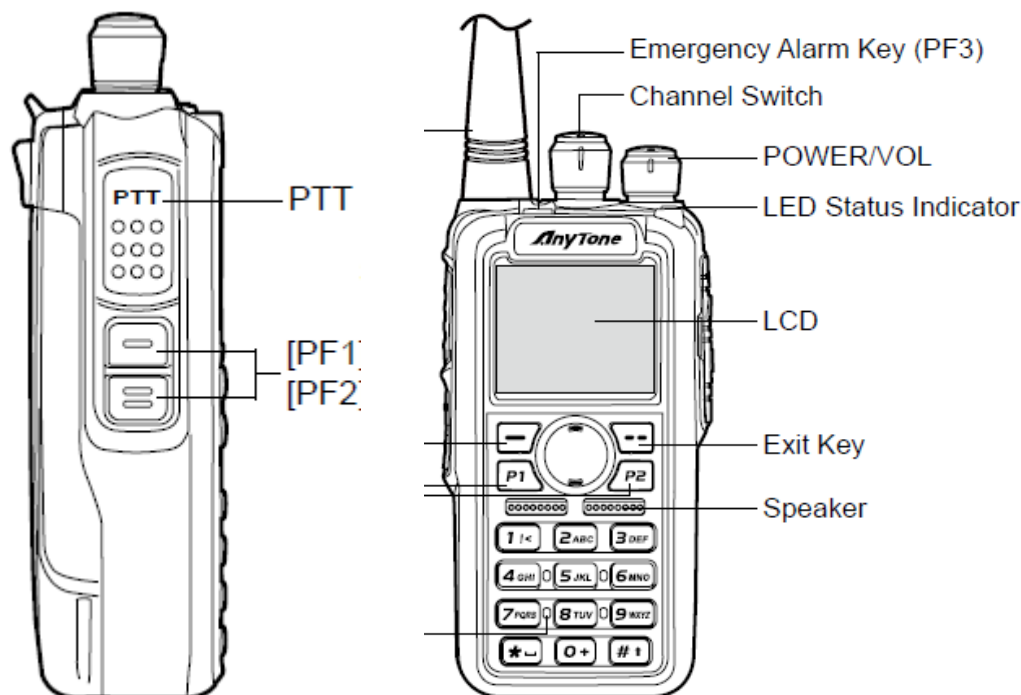

2. Open the Programming Software (CPS) and go to TOOLS > **Firmware Update**
3. Select the **Open File** button and select the appropriate **BHT_BOARD_V1.04_20220523.spi** file in the FW Update folder
4. Check and Set the **Com Port** that is correct for your PC connected to the radio.
5. Select the **Write** button to write the new FW to the radio.

For D578UVPLUS/ D578UVIII PLUS:

1. Press and hold both PUSH key(Channel Knob) and P6 key, and power the radio ON, the radio display "UPDATE MODE FOR LinkBoard"

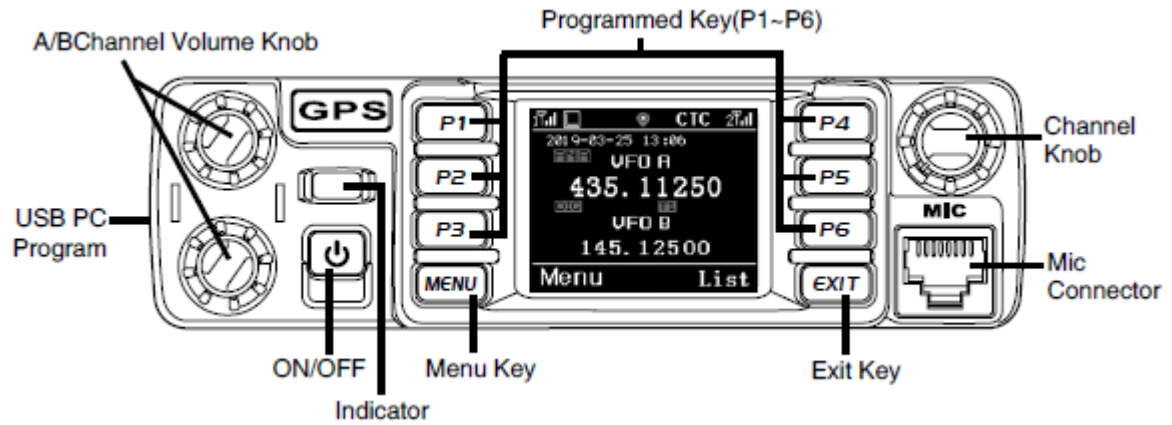

2. Open the Programming Software (CPS) and go to TOOLS > **Firmware Update**
3. Select the **Open File** button and select the appropriate **BHT_BOARD_V1.04_20220523.spi** file in the FW Update folder
4. Check and Set the **Com Port** that is correct for your PC connected to the radio.
5. Select the **Write** button to write the new FW to the radio.